
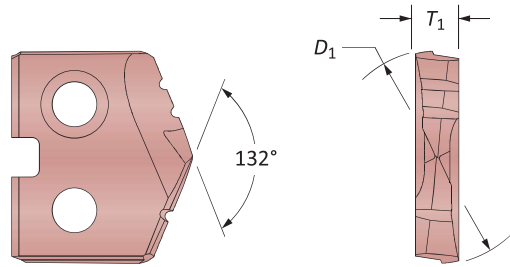





GEN2 T-A Drill Inserts

Y Series | Diameter Range: 0.374" - 0.436" (9.5mm - 11.07mm)



HSS Inserts – Super Cobalt • Carbide Inserts – C2 (K20) | C1 (K35)

Fractional Equivalent	Insert			HSS Part No.	Carbide Part No.	
	D ₁ inch	D ₁ mm	T ₁	 Super Cobalt	 C2 (K20)	 C1 (K35)
–	0.3740	9.50	3/32	45YH-9.5	4C2YH-9.5	4C1YH-9.5
3/8	0.3750	9.53	3/32	45YH-0012	4C2YH-0012	4C1YH-0012
W	0.3860	9.80	3/32	45YH-.386	4C2YH-.386	4C1YH-.386
25/64	0.3906	9.92	3/32	45YH-.390	4C2YH-.390	4C1YH-.390
–	0.3937	10.00	3/32	45YH-10	4C2YH-10	4C1YH-10
–	0.4016	10.20	3/32	45YH-10.2	4C2YH-10.2	4C1YH-10.2
13/32	0.4063	10.32	3/32	45YH-0013	4C2YH-0013	4C1YH-0013
–	0.4134	10.50	3/32	45YH-10.5	4C2YH-10.5	4C1YH-10.5
27/64	0.4219	10.72	3/32	45YH-.421	4C2YH-.421	4C1YH-.421
–	0.4252	10.80	3/32	45YH-10.8	4C2YH-10.8	4C1YH-10.8
–	0.4331	11.00	3/32	45YH-11	4C2YH-11	4C1YH-11



A30: 12

www.alliedmachine.com | 1.330.343.4283

Inserts sold in quantities of 2

Coatings not listed above can be supplied as non-stocked standards. Process fees apply. →

TiN = 45YT-XXXX	TiAlN = 45YA-XXXX
TiCN = 45YN-XXXX	AM200® = 45YH-XXXX