

ČSN 221420

DIN 206




VÝSTRUŽNÍKY RUČNÍ S VÁLCOVOU STOPKOU

HAND REAMERS WITH STRAIGHT SHANK

HANDREIBAHLEN MIT ZYLINDRISCHEM SCHAFT

HSS	BLANC	FORM B							
Steel <850 MPa	Cast iron	Al/alloy	Cu/alloy	Plastics					

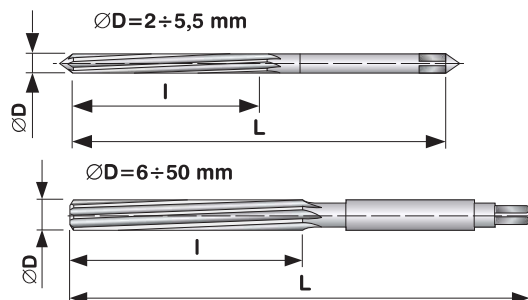

$\varnothing D$ mm	L mm	l mm	a mm		 kg	Code 221420
2,0	50	25	1,60	4	0,001	2 .. 50/25
2,2	54	27	1,80	4	0,001	2,2 .. 54/27
2,5	58	29	2,00	4	0,002	2,5 .. 58/29
2,8	62	31	2,24	4	0,002	2,8 .. 62/31
3,0	62	31	2,24	4	0,003	3 .. 62/31
3,5	71	35	2,80	4	0,004	3,5 .. 71/35
4,0	76	38	3,15	4	0,005	4 .. 76/38
4,5	81	41	3,55	4	0,007	4,5 .. 81/41
5,0	87	44	4,00	4	0,010	5 .. 87/44
5,5	93	47	4,50	4	0,013	5,5 .. 93/47
6,0	93	47	4,50	6	0,017	6 .. 93/47
6,5	100	50	5,00	6	0,023	6,5 .. 100/50
7,0	107	54	5,60	6	0,028	7 .. 107/54
7,5	107	54	5,60	6	0,031	7,5 .. 107/54
8,0	115	58	6,30	6	0,036	8 .. 115/58
8,5	115	58	6,30	6	0,041	8,5 .. 115/58
9,0	124	62	7,10	6	0,051	9 .. 124/62
10,0	133	66	8,00	6	0,067	10 .. 133/66
11,0	142	71	9,00	6	0,087	11 .. 142/71
12,0	152	76	10,00	8	0,110	12 .. 152/76
13,0	152	76	10,00	8	0,130	13 .. 152/76
14,0	163	81	11,20	8	0,160	14 .. 163/81
15,0	163	81	11,20	8	0,190	15 .. 163/81
16,0	175	87	12,50	8	0,230	16 .. 175/87
17,0	175	87	12,50	8	0,260	17 .. 175/87
18,0	188	93	14,00	8	0,320	18 .. 188/93
19,0	188	93	14,00	8	0,370	19 .. 188/93
20,0	201	100	16,00	8	0,410	20 .. 201/100
21,0	201	100	16,00	8	0,460	21 .. 201/100
22,0	215	107	18,00	8	0,540	22 .. 215/107
23,0	215	107	18,00	8	0,570	23 .. 215/107
24,0	231	115	20,00	8	0,690	24 .. 231/115
25,0	231	115	20,00	8	0,730	25 .. 231/115
26,0	231	115	20,00	8	0,830	26 .. 231/115
27,0	247	124	22,40	10	0,940	27 .. 247/124
28,0	247	124	22,40	10	1,150	28 .. 247/124
30,0	247	124	22,40	10	1,210	30 .. 247/124
32,0	265	133	25,00	10	1,410	32 .. 265/133
34,0	284	142	28,00	10	1,710	34 .. 284/142
36,0	284	142	28,00	10	1,900	36 .. 284/142
38,0	305	152	31,50	10	2,345	38 .. 305/152
40,0	305	152	31,50	10	2,530	40 .. 305/152
42,0	305	152	31,50	12	2,980	42 .. 305/152
44,0	326	163	35,50	12	3,380	44 .. 326/163
45,0	326	163	35,50	12	3,630	45 .. 326/163
46,0	326	163	35,50	12	3,850	46 .. 326/163
48,0	347	174	40,00	12	4,340	48 .. 347/174
50,0	347	174	40,00	12	4,650	50 .. 347/174

Poznámka / Note / Notiz: .. = lícování výstružníku (7 = H7; 8 = H8; 1 = H11) / .. = tolerances of reamer (7 = H7; 8 = H8; 1 = H11) /

.. = Reibahlenpassung (7 = H7; 8 = H8; 1 = H11)

FORM A na zvláštní požadavek / Version FORM A on the special request / Ausführung FORM A auf besondere Anforderung

